

KAS0520WE/W

ROUND PLASTIC CEILING / WALL LOUDSPEAKER



KAS0520WE/W: 20 WATTS / 5.25"

The KAS0520WE/W is a 20 Watts plastic ceiling / wall loudspeaker that has been designed for applications where stylish design together with high sound quality are required. The KAS0520WE/W is perfect for value-conscious indoors audio project requirements.

It's very effective for voice transmission, music and signal reproduction in commercial, industrial, and institutional applications. Applications include ceiling / wall installation in offices, banks, schools, restaurants, hotel/motels, and wherever precise transmission of audio is required.

- Carefully designed to satisfy the most critical eye
 - Plastic baffle, metal driver chassis and metal grille
 - Screw-on installation
-




KAS0520WE/W


TECHNICAL SPECIFICATIONS

GENERAL INFORMATION

Rated Power, Watts	20
Driver impedance, Ohms	8
Effective frequency range, Hz	100 - 17,500
S.P.L., @ 1 m, 1 Watt, dB	92
S.P.L., @ Full power / 1 m, dB	105
Dispersion at 1,000 Hz, Degrees	180
Directivity Q factor, 1 kHz	2.3
Dimensions front and depth, mm	$\phi 191 \times 78 / 205 \times 78$ mm
Net weight, Kgs	1.0
Color / Finish	White
Material	Plastic baffle Metal driver chassis Metal grille
Mounting	Screw-on installation

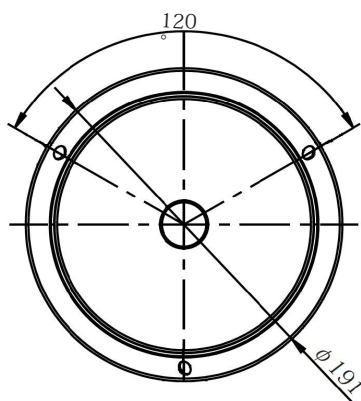

Front View

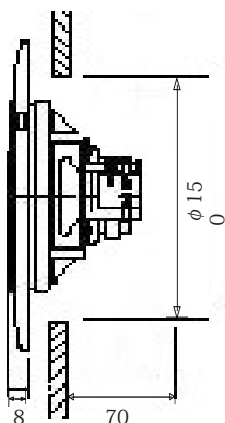

Unit: mm

Side View

Conversion: 1" = 25.4mm

Measurement conversions are approximate

Design and specifications subject to change without notice.

For USA, Canada, South America, Europe, Africa & Middle East- info@ultrakpa.com

ULTRAKPA Inc:

Astoria, NY 1103, U.S.A

Phone + 1 (914) 210-1483

info@ultrakpa.com



www.ultrakpa.com