

# KAS0606W/KAS0610W

RECESSED METAL CEILING LOUDSPEAKER



KAS0606W: 6 WATTS / 6.5" SPEAKER  
KAS0606WF: 6 WATTS / 6.5" SPEAKER WITH FIREDOME  
KAS0610WCOAX: 10 WATTS / 6.5" COAX SPEAKER

The KAS06 series loudspeakers are stylish yet unobtrusive and can be supplied with or without firedomes. The loudspeakers are made from a pressed steel epoxy coated chassis making the units more suitable for use in applications where background music is a primary requirement. These loudspeakers are compliant with BS5839 part 8.

- Carefully designed to satisfy the most critical eye
- Incorporates a twin cone driver, which has a wider frequency range than the standard single cone
- The KAS series incorporates a ceramic terminal and thermal fuse, and is suitable for use in voice alarm applications
- Coax version for enhanced music response (KAS0610WCOAX)




# KAS0606W/KAS0610W


## TECHNICAL SPECIFICATIONS

### GENERAL INFORMATION


Rated Power, Watts	6 (10 For KAS0610WCOAX)
Transformer tapings, Watts	6/3/1.5/0.75/0.25 (10/5/2.5/1.25 for COAX)
Driver impedance, Ohms	8
Effective frequency range, Hz	85 - 18,500 (80 - 20,000 for COAX)
S.P.L., @ 1m, 1 watt, dB	92 (91)
S.P.L., @ Full power / 1m, dB	100 (101)
Dispersion at 1,000 Hz, Degrees	160 (180)
Directivity Q factor, 1k Hz	2.1 (2.2)
Dimensions front and depth, mm	φ239 x 59
Net weight, Kgs	1.10
Colour / Finish	White
Material	Steel
Mounting	Quick-release, spring loaded bracket



Front View

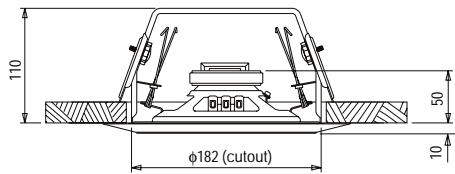

KAS0606W and KAS0610WCOAX Side View

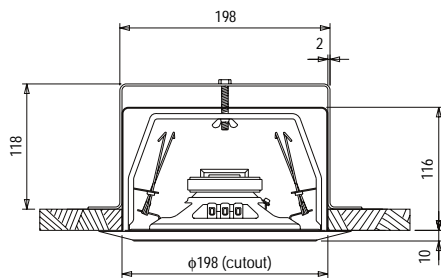

unit: mm

KAS0606WF Side View

Conversion: 1" = 25.4mm

Measurement conversions are approximate

Design and specifications subject to change without notice.

For USA, Canada, South America, Europe, Africa & Middle East- info@ultrakpa.com

### ULTRAKPA Inc:

Astoria, NY 1103, U.S.A

Phone + 1 (914) 210-1483

info@ultrakpa.com



www.ultrakpa.com