

KB2-N021F36i 2MP Network IR Bullet Outdoor Camera



DESCRIPTION

KB2-N021Fxxi series is the entry level of Ultrakpa new series of professional network bullet cameras it incorporates a 2MP 1/2.7-type CMOS image sensor providing smooth, full-HD (1080p/30fps) outstanding crisply detailed vibrant images with extremely low noise making it ideal for professional video security and surveillance applications via various detection modes: video tampering, network disconnection, IP conflict, illegal access

KB2-N021Fxxi bullet cameras support massive features such as motion detection, image flip, digital wide dynamic range, backlight compensation, highlight compensation, day and night (ICR), 3D digital noise reduction, privacy masking for 4 positions, smart IR for 30 meters distance in low luminance or totally dark environments ensuring that every detail is seen clearly

KB2-N021Fxxi bullet cameras provide high quality image with ultra low bit rate H.264+ and H.265+ video compressions; coming in weatherproof IP67 outdoor compact enclosure with 12V DC and POE operations

MAIN APPLICATIONS

- Professional Video Surveillance Applications in small to medium sized rooms, offices, meeting rooms and outdoor security applications for providing safe working, living and entertaining environments
- Indoor and Outdoor Applications thanks to the small size compact decorative design and the IP67 Ingress Protection

MAIN FEATURES

- 2MP 1/2.7" CMOS sensor
- 1920x1080p@25/30fps
- Day & Night (ICR)
- DWDR, HLC, BLC
- Digital Noise Reduction (3D)
- Privacy Mask Function
- Electronic Image Stabilization
- Various Detection Modes
- Digital Watermark
- Region of Interest
- H.264/H.265 Compressions
- Smart IR LED (30m)
- Image Flip
- 12VDC/POE
- ONVIF Compliant
- IP67

KB2-NO21F36i 2MP Network IR Bullet Outdoor Camera

TECHNICAL SPECIFICATIONS

CAMERA

Image Sensor	1/2.7" 2MP Progressive CMOS Sensor
Active Pixels	1920(H) x 1080(V) = 2.07M Pixels
Frame Rate	Main Stream: 1080p@1fps-30/25fps Sub Stream: D1@1fps-30/25fps
Min Illumination	0.01lux @F2.0
IR Control	Manual/Auto
IR Distance	30 meters (98.4ft)
Pan/Tilt /Rotation	Horizontal 0°~360° Vertical 0°~90° Rotation 0°~360°

LENS

Lens Type	Fixed
Focal Length	3.6mm
Max. Aperture	F2.0
Close Focus Distance	0.5m (1.6ft) / 0.9m (3.0 ft)
Angle Of View	2.8mm 125° 105° 57°
D, H,V	3.6mm 104° 87° 47°

VIDEO

Video Compression	H.265, H.264, H.264H, H.264B, MJPEG
Smart CODEC	Available
Stream Cability	Dual Streaming
Resolution	1080p(1920x1080), 1.3M(1280x960), 720P(1280x720), D1(704x576/480), VGA (640x480), CIF (352x288/240)
Bit Rate Control	CBR/VBR
Video Bit Rate	H.264: 32~6144Kbps, H.265: 12~6400Kbps

CAMERA FUNCTIONS

Day & Night	Auto(ICR) / Color / B/W
WDR	DWDR
BLC	Available
HLC	Available
DNR	3D
Electronic Image Stabilization	Available
Privacy Mask	Off / On (4 positions)
Gain Control	Manual/Auto
White Balance	Auto /Natural /Street Lamp / Outdoor / Manual Regional Custom
Motion Detection	Off / On (4 positions)
Region of Interest	Available (4 positions)
Electronic Shutter Speed	Auto/Manual 1/3~1/100000 sec
Smart IR	Available
Mirror	Available

NETWORK

Network	RJ-45 (10/100Base-T)
Users	Up to 20
Protocol	IPv4, HTTP, HTTPS, TCP, UDP, ARP, RTP, RTSP, SMTP, FTP, DNS, NTP, Multicast
Browser	IE, Chrome, Firefox
Mobile Phone	IOS, Android
Compatibility	ONVIF (Profile G), CGI, P2P, Gentec

ENVIRONMENT


Storage	- 40°C to +60°C, -40°F to 140°F
Operation	- 40°C to +60°C, -40°F to 140°F
Humidity	80%RH (non condensing) less than 95%(non condensing)
Altitude	3000 meter maximum, 10,000 feet maximum

GENERAL

Power Source	DC12V /POE (802.3af)
Power Consumption	4.3W
Ingress Protection	IP67
Weight	0.34Kg

DIMENSIONS

Unit : mm

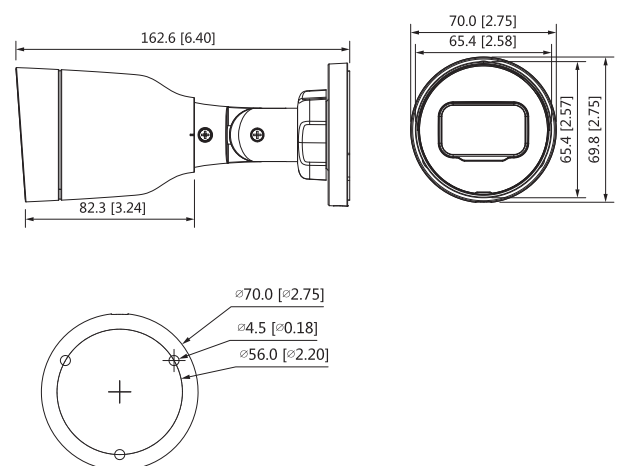

Conversion: 1" = 25.4mm
Measurement conversions are approximate



Every effort has been made to ensure that all the information in this document was correct at the time of going to press. However we are constantly striving to improve our range wherever possible and therefore reserve the right to change the specification of any product without prior notice

R&D is constantly improving our products therefore specifications, features and appearance are subjected to change without notice

ULTRAKPA

For USA, Canada, South America, Europe, Africa & Middle East - info@ultrakpa.com

ULTRAKPA Inc

Astoria, NY 11103, U.S.A

Phone +1 (914) 210-1483 info@ultrakpa.com

www.Ultrakpa.com