

KB5-N021M213iW 2MP Network IR Motorized WDR Outdoor Bullet Camera



DESCRIPTION

The KB5-N021M213iW is one of Ultrakpa new series of professional network varifocal motorized bullet cameras; it incorporates a 2MP 1/2.8-type CMOS image sensor providing smooth, full-HD 1080p/30fps, outstanding crisply detailed vibrant images with extremely low noise making it ideal for professional video security and surveillance applications via various detection modes (video tampering, storage problem, network disconnection, IP conflict)

The KB5-N021M213iW bullet cameras support massive features such as motion detection, image flip, wide dynamic range, backlight compensation, highlight compensation, day and night (ICR), 3D digital noise reduction, privacy masking for 4 positions, smart IR for 60 meters distance in low luminance or totally dark environments ensuring that every detail is seen clearly

The KB5-N021M213iW bullet cameras provide high quality image with low bit rate H.264 and H.265 video compressions; coming in weatherproof IP67 outdoor medium sized enclosure with 12V DC and POE operations

MAIN APPLICATIONS

- Professional Video Surveillance Applications in outdoor security applications for providing safe working, living and entertaining environments with intelligent analysis, tripware and long IR distance
- Professional Outdoor Applications thanks to the medium sized IP67 Ingress Protection Housing

MAIN FEATURES

- 2MP 1/2.8" CMOS sensor
- 1920x1080p@25/30fps
- Day & Night (ICR)
- WDR, HLC, BLC
- Digital Noise Reduction (3D)
- Privacy Mask Function
- Support up to 128GB SD Card
- Intelligent Analysis
- Varifocal Motorized Lens
- Region of Interest
- H.264/H.265 Compressions
- Smart IR LED (60m)
- Image Flip
- 12VDC/POE
- ONVIF Compliant
- IP67

KB5-N021M213iW 2MP Network IR Motorized WDR Outdoor Bullet Camera

TECHNICAL SPECIFICATIONS

CAMERA

Image Sensor	1/2.8" 2MP Progressive CMOS Sensor
Active Pixels	1920(H) x 1080(V) = 2.07M Pixels
Frame Rate	Main Stream: 1080p@1fps-30/25fps Sub Stream: D1@1fps-30/25fps
Min Illumination	0.006lux @F1.4
IR Control	Manual/Auto
IR Distance	60 meters (197ft)
Pan/Tilt /Rotation	Horizontal 0°~360° Vertical 0°~90° Rotation 0°~360°

LENS

Lens Type	Motorized Varifocal
Focal Length	2.7-13.5mm
Max. Aperture	F1.4
Close Focus Distance	0.2m
Angle Of View	106° 29°
H, V	57° 17°

VIDEO

Video Compression	H.265, H.264H, MJPEG (Sub Stream)
Smart CODEC	Available
Stream Cability	Dual Streaming
Resolution	1080p(1920x1080), 1.3M(1280x960), 720P(1280x720), D1(704x576/480), VGA (640x480), CIF (352x288/240)
Bit Rate Control	CBR/VBR
Video Bit Rate	H.264: 32K~10240Kbps, H.265: 12K~6400Kbps
Intelligent Analysis	Tripwire, Intrusion
Event Trigger	Motion Detection, Video Tampering, Scene Changing Network Disconnection, IP address Conflict, Illegal Access, Storage anomaly

CAMERA FUNCTIONS

Day & Night	Auto(ICR) / Color / B/W
WDR	WDR (120dB)
BLC	Available
HLC	Available
DNR	3D
Privacy Mask	Off / On (4 positions)
Gain Control	Manual/Auto
White Balance	Auto /Natural /Street Lamp / Outdoor / Manual
Digital Zoom	16x
Motion Detection	Off / On (4 positions)
Region of Interest	Available (4 positions)
Electronic Shutter Speed	Auto/Manual 1/3~1/100000 sec
Smart IR	Available
Mirror	Available



Every effort has been made to ensure that all the information in this document was correct at the time of going to press. However we are constantly striving to improve our range wherever possible and therefore reserve the right to change the specification of any product without prior notice

R&D is constantly improving our products therefore specifications, features and appearance are subjected to change without notice

ULTRAKPA

For USA, Canada, South America, Europe, Africa & Middle East - info@ultrakpa.com

NETWORK

Network	RJ-45 (10/100Base-T)
Users	10/20
Protocol	IPv4,IPv6,HTTP,HTTPS,TCP,UDP,ARP,RTP,RTSP,RTCP,SMTP,FTP,DNS,DDNS,QoS,UPnP,NTP,TLS,ICMP,IGMP Multicast,PPPoE,IEEE802.1x,Bonjour, SNMP
Browser	IE, Chrome, Firefox, Safari
Mobile Phone	IOS, Android
Compatibility	ONVIF (Profile S, Profile G), API

ENVIRONMENT


Storage	-30°C to +60°C, -22°F to 140°F
Operation	-30°C to +60°C, -22°F to 140°F
Humidity	80%RH (non condensing) less than 95%(non condensing)
Altitude	3000 meter maximum, 10,000 feet maximum

GENERAL

Power Source	DC12V /POE (IEEE802.3af)(Class 0)
Power Consumption	12.9W
Ingress Protection	IP67
Weight	0.69Kg

DIMENSIONS

Unit : mm

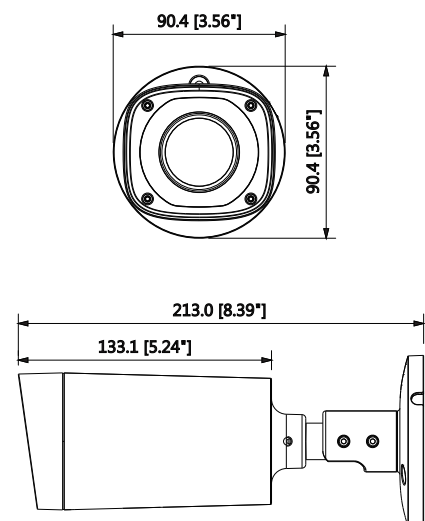

Conversion: 1" = 25.4mm
Measurement conversions are approximate

ULTRAKPA Inc

Astoria, NY 11103, U.S.A
Phone +1 (914) 210-1483 info@ultrakpa.com
www.Ultrakpa.com