

## KB6-N041M213iWV 4MP Network IR Motorized WDR Vandal-proof Bullet Camera



### DESCRIPTION

KB6-N041M213iW Ultrakpa professional network varifocal motorized bullet camera incorporates a 4MP 1/1.3-type CMOS image sensor providing smooth outstanding crisply detailed vibrant images with extremely low noise making it ideal for professional video security and surveillance applications via various detection modes (video tampering, network disconnection, IP conflict, illegal access, storage problem).

The KB6-N041M213iW bullet cameras support massive features such as motion detection, image flip, wide dynamic range, backlight compensation, highlight compensation, day and night (ICR), 3D digital noise reduction, privacy masking for 4 positions, smart IR for 60 meters distance in low luminance or totally dark environments ensuring that every detail is seen clearly.

The KB6-N041M213iW bullet cameras provide high quality image with low bit rate H.264 and H.265 video compressions; coming in weatherproof IP67 outdoor medium sized enclosure with 12V DC and POE operations.

### MAIN APPLICATIONS

- Professional Video Surveillance Applications in outdoor security applications for providing safe working, living and entertaining environments with intelligent analysis, 4K resolution and long IR distance
- Professional Outdoor Applications thanks to the medium sized IP67 Ingress Protection Housing

### MAIN FEATURES

- 4MP 1/1.3" CMOS sensor
- 2688x1520@20fps
- Day & Night (ICR)
- WDR(120dB), HLC, BLC
- Digital Noise Reduction (3D)
- Privacy Mask Function
- Support up to 128GB SD Card
- Intelligent Analysis
- Varifocal Motorized Lens
- Region of Interest
- H.264/H.265 Compressions
- Smart IR LED (60m)
- Image Flip
- 12VDC/POE
- ONVIF Compliant
- IP67, IK10

## KB6-N041M213iWV 4MP Network IR Motorized WDR Vandal-proof Bullet Camera

### TECHNICAL SPECIFICATIONS

#### CAMERA

Image Sensor	1/1.3" 4MP Progressive CMOS Sensor
Active Pixels	2688(H) x 1520(V) = 4.085M Pixels
Frame Rate	Main Stream: 4MP@1-20fps/ 3MP@ 1-30/25fps Sub Stream: D1@1fps-30/25fps
Min Illumination	0.008lux @F1.5
IR Control	Manual/Auto
IR Distance	60 meters (197ft)
Pan/Tilt /Rotation	Horizontal 0°~360° Vertical 0°~90° Rotation 0°~360°

#### LENS

Lens Type	Motorized Varifocal
Focal Length	2.7-13.5mm
Max. Aperture	F1.5
Close Focus Distance	0.2m
Angle Of View	104°                      27°
H, V	55°                        15°

#### VIDEO

Video Compression	H.265, H.264, MJPEG
Smart CODEC	Available
Stream Cability	Dual Streaming
Resolution	4M(2688x1520), 3M(2560x1440), 3M(2304x1296), 1080p(1920x1080), 1.3M(1280x960), 720P(1280x720), D1(704x576/480), VGA(640x480), CIF (352x288/240)
Bit Rate Control	CBR/VBR
Video Bit Rate	H.264: 32~6144Kbps, H.265: 12~6144Kbps
Intelligent Analysis	Tripwire, Intrusion
Event Trigger	Motion Detection, Video Tampering, Scene Changing Network Disconnection, IP address Conflict, Illegal Access, Storage anomaly

#### CAMERA FUNCTIONS

Day & Night	Auto(ICR) / Color / B/W
WDR	WDR (120dB)
BLC	Available
HLC	Available
DNR	3D
Privacy Mask	Off / On (4 positions)
Gain Control	Manual/Auto
White Balance	Auto /Natural /Street Lamp / Outdoor / Manual
Motion Detection	Off / On (4 positions)
Region of Interest	Available (4 positions)
Electronic Shutter Speed	Auto/Manual 1/3~1/100000 sec
Smart IR	Available
Mirror	Available



Every effort has been made to ensure that all the information in this document was correct at the time of going to press. However we are constantly striving to improve our range wherever possible and therefore reserve the right to change the specification of any product without prior notice

R&D is constantly improving our products therefore specifications, features and appearance are subjected to change without notice

#### NETWORK

Network	RJ-45 (10/100Base-T)
Users	10/20
Protocol	IPv4, IPv6, HTTP, HTTPS, TCP, UDP, ARP, RTP, RTSP, RTCP, SMTP, FTP, DNS, DDNS, QoS, UPnP, NTP, ICMP, IGMP, NFS PPPoE, IEEE802.1x, Bonjour, RTMP, SFTP, SNMP, Multicast
Browser	IE, Chrome, Firefox
Mobile Phone	IOS, Android
Compatibility	ONVIF, CGI

#### ENVIRONMENT


Storage	- 40°C to +60°C, -40°F to 140°F
Operation	- 30°C to +60°C, -22°F to 140°F
Humidity	80%RH (non condensing) less than 95%(non condensing)
Altitude	3000 meter maximum, 10,000 feet maximum

#### GENERAL

Power Source	DC12V /POE (IEEE802.3af)(Class 0)
Power Consumption	9.7W
Ingress Protection	IP67
Vandal Resistant	IK10
Weight	0.87Kg

#### DIMENSIONS

Unit : mm

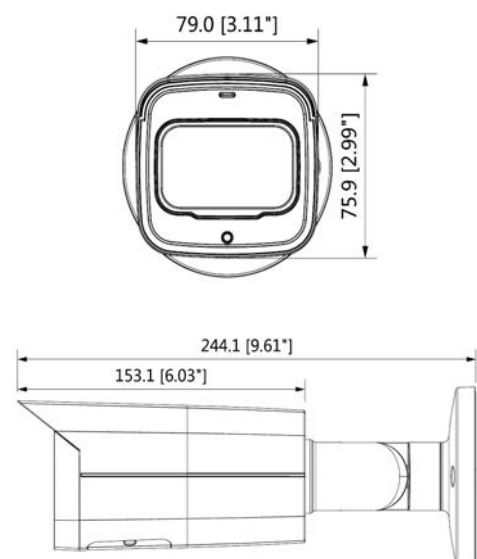

Conversion: 1" = 25.4mm  
Measurement conversions are approximate

# ULTRAKPA

For USA, Canada, South America, Europe, Africa & Middle East - [info@ultrakpa.com](mailto:info@ultrakpa.com)

**ULTRAKPA Inc**

Astoria, NY 11103, U.S.A

Phone + 1 (914) 210-1483 [info@ultrakpa.com](mailto:info@ultrakpa.com)

[www.Ultrakpa.com](http://www.Ultrakpa.com)